COCL= Center of opening from cover left side
COW = Clear opening width
Recom. (SBL-2xLAP-100)/1,5
Min. 1000, max. (SBL-2xLAP-G)/1,5
CL = Cover length incl 2x30 mm end plates
Recom. (1,5xCOW) + (2xLAP) + 100 + (2X30)
Min. (1,5xCOW) + (2xLAP) + 60
DH = Door leaf height
SBL = Support beam length
Recom. (1,5xCOW) + (2xLAP) + 100
Min. (1,5xCOW) + (2xLAP), Max. 6100
LAP = Overlapping
G= Space between closed door leaves
DW= Door width (If door adaptor state DW)
K= Clear opening width, fixed screens



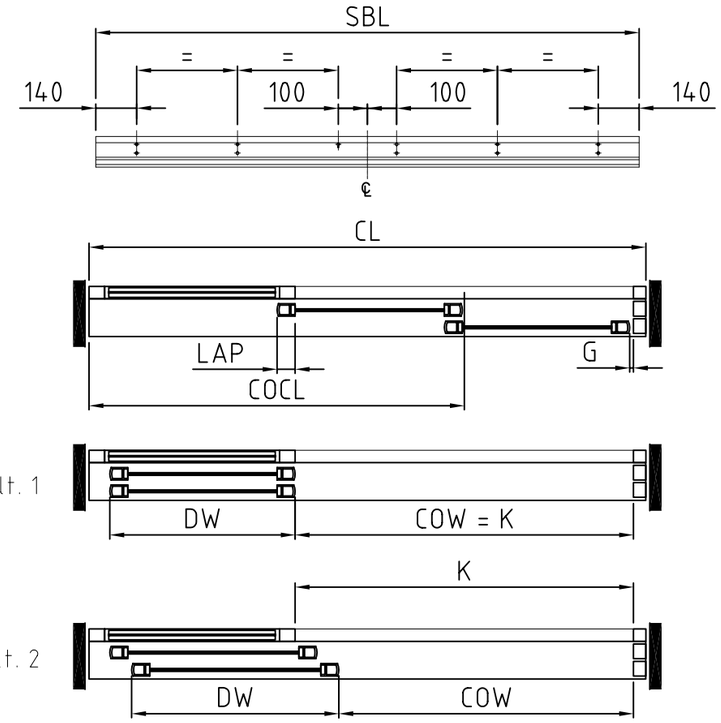

COCL= Center of opening from cover left side
COW = Clear opening width
Recom. (SBL-2xLAP-100)/1,5
Min. 1600, max. (SBL-2xLAP-G)/1,5
CL = Cover length incl 2x30 mm end plates
Recom. (1,5xCOW) + (2xLAP) + 100 + (2X30)
Min. (1,5xCOW) + (2xLAP) + 60
DH = Door leaf height
SBL = Support beam length
Recom. (1,5xCOW) + (2xLAP) + 100
Min. (1,5xCOW) + (2xLAP), Max. 6100
LAP = Overlapping
G= Space between closed door leaves
DW= Door width (If door adaptor state DW)
K= Clear opening width, fixed screens

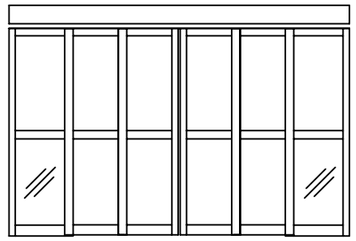

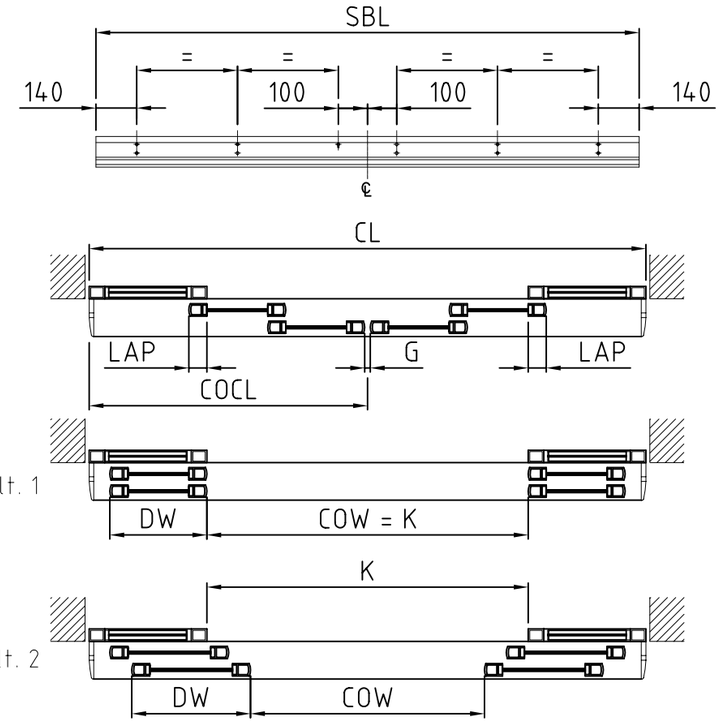

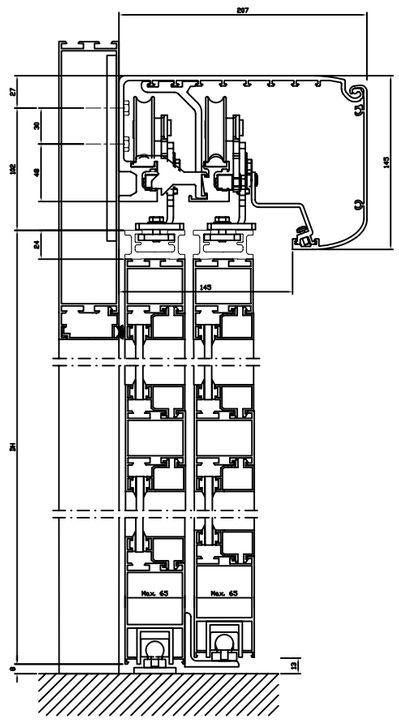

Sliding door operator
UniSlideT

besam®

A

1000399