

# State when ordering

FW=.....mm  
 FH=.....mm  
 X= .....mm  
 COW=.....mm  
 COH=.....mm  
☐ Cover  
 CL=.....mm  
☐ TightSeal  
 If TightSeal, the floor must be level  
 and not differ more than  $\pm 3$  mm

# Surface treatment


☐ Silver anodized  
 Special anodized.....  
 RAL.....  
 Special powder coating.....  
 .....

# Glass option see drw. 1009030

State glass code:  
 .....  
 If 12 mm glass FW max. 5300  
 when FH=max.

# Installation

☐ Floor heating  
☐ Other .....

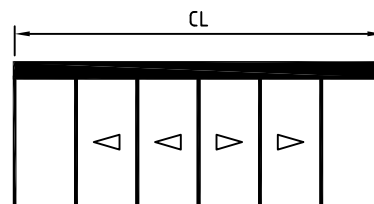

Scale 1:5

Customer:

Besam ref:

Door id:

Date:

Project No:

Sign:

**ADS Slim telescopic**  
**6 Panel beam mounted**  
**Article No. 800226**

**besam**  
**ASSA ABLOY**

8.0

833063