

State when ordering

FW=.....mm
 FH=.....mm
 X= mm
 COW=.....mm
 COH=.....mm
☐ Cover
 CL=.....mm
☐ TightSeal
 If TightSeal, the floor must be level
 and not differ more than ± 3 mm

Overlight

OW=.....mm
 OH=.....mm
☐ Overlight, one glass pane
 (OW=min 500, max 3000)
☐ Overlight, two glass panes
 (OW=min 1000, max 6000)
☐ Overlight, three glass panes
 (OW=min 1800, max 6000)

Surface treatment

☐ Silver anodized
 Special anodized.....
 RAL.....
 Special powder coating.....

Glass option see drw. 1009030


State glass code:

.....
 If 12 mm glass FW max. 5300
 when FH=max.



Installation

☐ Floor heating
☐ Other

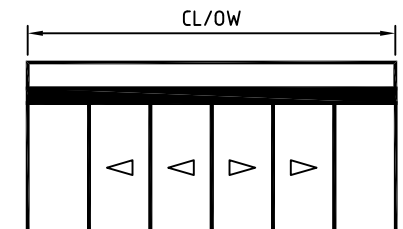

Scale 1:6

Customer:

Besam ref:

Door id:

Date:

Project No:

Sign:

**ADS Slim telescopic
 6 Panel beam mounted
 with overlight**

besam
ASSA ABLOY

6.0

1002635